



IMPACT SOCKETS & ACCESSORIES

Professional production & quality control



KING TONY impact socket 50% higher torque on performance.


Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our Impact socket reach 50% higher torque than DIN standards.

Standard Impact Socket & Rail Set

2535M

1/4"

- DIN 3129, ISO 2725-2



KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg	kg
253504M	4	7.5	13	4	23	12	20	600
253545M	4.5	8.1	13	5	23	12	20	600
253505M	5	8.8	13	6	23	11	20	600
253555M	5.5	9.4	13	6	23	12	20	600
253506M	6	10.0	13	7	23	13	20	600
253507M	7	11.3	13	7	23	13	20	600
253510M	10	15.0	13	9	23	17	12	360
253513M	13	18.8	13	9	23	22	12	360
253514M	14	19.8	13	9	23	23	10	300

Standard Impact Socket

3535M


3/8"

- DIN 3129, ISO 2725-2

3535S

3/8"

- ANSI / ASME B107.2



KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg	kg
353506M	6	10.6	19	5	32	33	12	360
353507M	7	11.8	19	5	32	33	12	360
353508M	8	13.2	19	6	32	35	12	360
353509M	9	14.5	19	6	32	36	12	360
353510M	10	15.5	19	7	32	37	12	360
353511M	11	17.0	19	7	32	39	12	360
353512M	12	18.2	19	8	32	39	12	360
353513M	13	19.4	22	9	32	53	10	200
353514M	14	20.7	22	9	32	54	10	200
353515M	15	22.0	22	10	32	56	10	200
353516M	16	23.8	22	10	32	57	10	200
353517M	17	24.8	22	11	32	58	10	200
353518M	18	25.8	22	11	32	62	10	200
353519M	19	27.6	22	13	32	63	10	160

KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg	kg
353508S	1/4	10.8	19	5	32	32	12	360
353510S	5/16	13.0	19	6	32	36	12	360
353512S	3/8	15.3	19	7	32	38	12	360
353514S	7/16	17.0	19	7	32	38	12	360
353516S	1/2	18.2	19	9	32	53	12	360
353518S	9/16	20.7	22	9	32	53	10	200
353520S	5/8	23.8	22	10	32	57	10	200
353522S	11/16	24.5	22	11	32	60	10	200
353524S	3/4	27.0	22	11	32	61	10	160

Impact Accessory

2863P

1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3121



KT NO.	Spec.	D mm	g	kg
2863P	1/4"F x 3/8"M	14	20	12 / 360

Deep Impact Socket

3435M


3/8"

- DIN 3121

3435S

3/8"

- ANSI / ASME B107.2



KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg	kg
343506M	6	10.6	19	10	65	50	6	120
343507M	7	11.8	19	10	65	55	6	120
343508M	8	13.2	19	12	65	68	6	120
343509M	9	14.5	19	12	65	65	6	120
343510M	10	15.5	19	12	65	82	6	120
343511M	11	17.0	19	13	65	75	6	120
343512M	12	18.2	19	14	65	89	6	120
343513M	13	19.4	22	14	65	111	6	120
343514M	14	20.7	22	14	65	109	6	120
343515M	15	22.0	22	16	65	112	6	120
343516M	16	23.8	22	16	65	126	6	96
343517M	17	24.8	22	17	65	143	6	96
343518M	18	25.8	22	18	65	133	6	96
343519M	19	27.6	22	20	65	171	6	96
343520M	20	28.3	22	20	65	154	6	96
343521M	21	29.5	22	22	65	161	6	96
343522M	22	30.8	22	22	65	178	5	60
343523M	23	32.0	22	24	65	177	5	60
343524M	24	32.5	22	24	65	176	5	60



KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg	kg
343508S	1/4	10.8	19	10	63.5	62	6	120
343510S	5/16	13.0	19	12	63.5	71	6	120
343512S	3/8	15.3	19	12	63.5	82	6	120
343514S	7/16	17.0	19	13	63.5	84	6	120
343516S	1/2	18.2	19	14	63.5	113	6	120
343518S	9/16	20.7	22	14	65	114	6	120
343520S	5/8	23.8	22	16	65	126	6	96
343522S	11/16	24.5	22	17	65	138	6	96
343524S	3/4	27.0	22	20	65	154	6	96
343526S	13/16	29.5	22	22	65	156	6	96
343528S	7/8	30.8	22	22	65	172	5	60


Impact Star Socket

3575M

 3/8"

- For torx external screw
- DIN 3121

KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
357505M	E5	9.6	19	4.0	32	31	12 / 360
357506M	E6	10.2	19	5.0	32	31	12 / 360
357507M	E7	10.8	19	6.0	32	33	12 / 360
357508M	E8	11.5	19	6.5	32	35	12 / 360
357510M	E10	12.0	19	7.0	32	33	12 / 360
357512M	E12	14.0	19	9.0	32	34	12 / 360
357514M	E14	17.0	19	9.5	32	40	12 / 360



Impact Bit Socket

KT No. & D1





- Air pressure must not exceed 90PSI (6.3bar)
- Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

3051

 3/8"

- For phillips head screw
- DIN 3121





KT NO.	⊕ No.	L mm		
305101	PH1	55	33	12 / 360
305102	PH2	55	35	12 / 360
305103	PH3	55	40	12 / 360
305104	PH4	55	45	12 / 360

3052

 3/8"

- For slotted head screw
- DIN 3121





KT NO.	Tip width mm	L mm		
305255	5.5	55	32	12 / 360
305208	8	55	39	12 / 360
305210	10	55	45	12 / 360

3055M

 3/8"

- For hexagon head screw
- DIN 3121





KT NO.	mm	L mm	Max. torq N-m		
305504M	H4	55	20.8	34	12 / 360
305505M	H5	55	36.0	38	12 / 360
305506M	H6	55	62.4	40	12 / 360
305507M	H7	55	97.0	43	12 / 360
305508M	H8	55	144.0	46	12 / 360
305510M	H10	55	264.0	55	12 / 360
305512M	H12	55	480.0	65	12 / 360
305514M	H14	55	650.0	77	12 / 288
305516M	H16	55	680.0	91	12 / 288
305517M	H17	55	715.0	99	12 / 288

3055S

 3/8"

- For hexagon head
- DIN 3121





KT NO.	inch	L mm	Max. torq N-m		
305504S	1/8	55	18.8	34	12 / 360
305545S	9/64	55	20.8	34	12 / 360
305505S	5/32	55	22.5	36	12 / 360
305506S	3/16	55	36.0	36	12 / 360
305507S	7/32	55	62.4	38	12 / 360
305508S	1/4	55	93.6	41	12 / 360
305510S	5/16	55	144.0	46	12 / 360
305512S	3/8	55	264.0	54	12 / 360
305516S	1/2	55	518.0	71	12 / 360

3065M

 3/8"

- For hexagon head screw
- DIN 3121



KT NO.	mm	L mm	Max. torq N-m		
306504M	H4	90	20.8	39	8 / 160
306505M	H5	90	36.0	44	8 / 160
306506M	H6	90	62.4	50	8 / 160
306508M	H8	90	144.0	66	8 / 160
306510M	H10	90	264.0	86	8 / 160



Impact Bit Socket

KT No. & D1

3053

3063

3/8"

- For torx internal screw
- DIN 3121



KT NO.	Size	L mm		
305310	T10	55	35	12 / 360
305315	T15	55	34	12 / 360
305320	T20	55	35	12 / 360
305325	T25	55	36	12 / 360
305327	T27	55	36	12 / 360
305330	T30	55	36	12 / 360
305340	T40	55	39	12 / 360
305345	T45	55	43	12 / 360
305350	T50	55	44	12 / 360
305355	T55	55	52	12 / 288
306320	T20	90	42	8 / 160
306325	T25	90	42	8 / 160
306327	T27	90	43	8 / 160
306330	T30	90	45	8 / 160
306340	T40	90	50	8 / 160
306345	T45	90	57	8 / 160
306350	T50	90	64	8 / 160
306355	T55	90	82	8 / 160

Impact Accessory

3862P

3/8"

- Adapter
- Convert to 1/4" drive
- 3862P → Max. torque : 62 N·m
- DIN 3121



KT NO.	Spec.	D mm		
3862P	3/8" F x 1/4" M	20.8	32	24 / 384

3864P

3/8"

- Adapter
- Convert to 1/2" drive
- DIN 3121



KT NO.	Spec.	D mm		
3864P	3/8" F x 1/2" M	20.8	53	24 / 384

Impact Accessory

3147

3/8"

- Bit holder



KT NO.	Size	L mm		
314708S	1/4"	40	41	12 / 420
314710S	5/16"	40	43	12 / 420
314710M	10mm	40	42	12 / 420

3260P

3/8"

- Extension bar
- DIN 3121




KT NO.	Overall length inch	Overall length mm		
3260-03P	3	75	98	6 / 120
3260-04P	4	100	121	8 / 160
3260-05P	5	125	147	8 / 144
3260-06P	6	150	169	5 / 100
3260-08P	8	200	217	6 / 72
3260-10P	10	250	264	6 / 54

3796P

3/8"

- Universal joint
- DIN 3121



KT NO.	Overall length inch	Overall length mm	D mm		
3796P	2	50	22	87	10 / 200

90608

90609

3/8"

- Locking pin
- Chrome vanadium steel
- DIN 3129



KT NO. Desp. ϕ d / l Applied to socket sizes

90608	pin	2.5	14	3535M (6~12 mm)	3535S (1/4~1/2 inch)
				3435M (6~12 mm)	3435S (1/4~1/2 inch)
				3055M (4~12 mm)	3055S (3/16~1/2 inch)
				3065M (4~10 mm)	3053 (T10~T15)
				3575M (E5~E14)	
3053.3055.3065.3147.3862.3864					

90609	pin	2.5	16	3535M (13~19 mm)	3535S (9/16~3/4 inch)
				3435M (13~24 mm)	3435S (9/16~7/8 inch)
				3260.3796	

Impact Bit Socket Set

3406MP

3/8"

- For hexagon head screw
- 55mmL

Metal case size (mm) :
203 x 79 x 41 (0.023 cuft)

6
PC.



Contents 0.72 1 / 20

3055M H4, H5, H6, H8, H10, H12

3419PP

3/8"

- For torx internal head
- 55mmL

Metal case size (mm) :
203 x 79 x 41 (0.023 cuft)

9
PC.



Contents 0.62 1 / 20

3053 T10, T15, T20, T25, T27, T30, T40, T45, T50



Standard Impact Socket


KT No. & D1



4530M

1/2"

- DIN 3129, ISO 2725-2




KT NO.	mm	D1 mm	D2 mm	l mm	L mm		
453008M	8	15.0	25	7	38	65	10 / 200
453009M	9	16.3	25	7	38	68	10 / 200
453010M	10	17.6	25	8	38	68	10 / 200
453011M	11	18.8	25	8	38	69	10 / 200
453012M	12	20.0	25	9	38	73	10 / 200
453013M	13	21.2	25	10	38	71	10 / 200
453014M	14	22.5	25	10	38	78	10 / 200
453015M	15	23.8	30	11	38	111	10 / 160
453016M	16	25.0	30	11	38	118	10 / 160
453017M	17	26.2	30	12	38	116	10 / 160
453018M	18	27.5	30	13	38	115	10 / 160
453019M	19	28.8	30	13	38	114	10 / 160
453020M	20	29.5	30	13	38	117	10 / 160
453021M	21	30.0	30	14	40	121	8 / 160
453022M	22	32.4	30	14	40	129	8 / 160
453023M	23	33.2	30	15	40	130	8 / 160
453024M	24	34.4	30	15	42	147	6 / 120
453025M	25	36.0	30	15	42	164	6 / 120
453026M	26	37.0	30	15	42	168	6 / 120
453027M	27	38.0	30	16	44	170	6 / 120
453028M	28	41.0	30	16	44	205	6 / 120
453029M	29	41.0	30	17	44	184	6 / 120
453030M	30	42.0	30.5	17	44	197	6 / 120
453032M	32	46.0	30	19	44	226	6 / 120
453033M	33	46.0	30	19	46	246	6 / 96
453034M	34	46.0	30	20	46	217	6 / 96
453036M	36	47.0	30	20	46	214	6 / 96
453038M	38	50.0	30	21	50	279	6 / 60
453041M	41	56.0	30	22	52	402	6 / 60

4530S

1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	l mm	L mm		
453016S	1/2	20	25	10	38	72	10 / 200
453018S	9/16	22	25	10	38	76	10 / 200
453020S	5/8	24	25	11	38	78	10 / 200
453022S	11/16	26	30	12	38	116	10 / 160
453024S	3/4	28.8	30	13	38	120	10 / 160
453026S	13/16	30	30	14	40	122	8 / 160
453028S	7/8	32	30	14	40	138	8 / 160
453030S	15/16	34	30	15	42	148	6 / 120
453032S	1	36	30	15	42	162	6 / 120
453034S	1-1/16	38	30	16	44	167	6 / 120
453036S	1-1/8	41	30	17	44	189	6 / 120
453038S	1-3/16	42	30.5	17	44	203	6 / 120


Stubby Impact Socket

4525M

1/2"

- For impact wrench use
- DIN 3129, ISO 2725-2

19, 22, 24 mm




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg
452513M	13	20	26	5.5	28.5	57	10 / 160
452514M	14	22	26	5.5	28.5	61	10 / 160
452517M	17	26	26	5.5	28.5	64	10 / 160
452519M	19	28	26	10	28.5	63	10 / 160
452521M	21	30	30	10	28.5	81	8 / 160
452522M	22	32	30	10	28.5	87	8 / 160
452524M	24	34	30	10	28.5	80	6 / 120

Standard Impact Socket

4535M

1/2"

- DIN 3129, ISO 2725-2




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg
453508M	8	15.0	25	7	38	67	10 / 200
453509M	9	16.3	25	7	38	69	10 / 200
453510M	10	17.6	25	8	38	70	10 / 200
453511M	11	18.8	25	8	38	71	10 / 200
453512M	12	20.0	25	9	38	73	10 / 200
453513M	13	21.2	25	10	38	75	10 / 200
453514M	14	22.5	25	10	38	78	10 / 200
453515M	15	23.8	30	11	38	117	10 / 160
453516M	16	25.0	30	11	38	118	10 / 160
453517M	17	26.2	30	12	38	121	10 / 160
453518M	18	27.5	30	13	38	123	10 / 160
453519M	19	28.8	30	13	38	117	10 / 160
453520M	20	29.5	30	13	38	115	10 / 160
453521M	21	30.0	30	14	40	118	8 / 160
453522M	22	31.8	30	14	40	132	8 / 160
453523M	23	33.8	30	15	40	144	8 / 160
453524M	24	33.8	30	15	42	139	6 / 120
453525M	25	35.8	30	15	42	156	6 / 120
453526M	26	37.8	30	15	42	173	6 / 120
453527M	27	37.8	30	16	44	175	6 / 120
453528M	28	39.8	30	16	44	204	6 / 120
453529M	29	39.8	30	17	44	198	6 / 120
453530M	30	41.8	30.5	17	44	206	6 / 120
453532M	32	46.0	30	19	44	239	6 / 120
453533M	33	46.0	30	19	46	246	6 / 96
453534M	34	46.0	30	20	46	240	6 / 96
453535M	35	46.0	30	20	46	227	6 / 96
453536M	36	47.0	30	20	46	243	6 / 96
453537M	37	49.0	30	21	48	271	6 / 60

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg
453538M	38	50.0	30	21	50	291	6 / 60
453539M	39	51.0	30	22	50	306	6 / 60
453541M	41	56.0	30	22	52	403	6 / 60
453546M	46	64.0	30	23	55	595	4 / 32

4535S

1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	kg
453510S	5/16	15	25	7	38	66	10 / 200
453512S	3/8	17	25	7	38	70	10 / 200
453514S	7/16	18	25	8	38	70	10 / 200
453516S	1/2	20	25	10	38	72	10 / 200
453518S	9/16	22	25	10	38	77	10 / 200
453520S	5/8	24	25	11	38	80	10 / 160
453522S	11/16	26	30	12	38	116	10 / 160
453524S	3/4	28.8	30	13	38	116	10 / 160
453526S	13/16	30	30	14	40	127	8 / 160
453528S	7/8	32	30	14	40	136	8 / 160
453530S	15/16	34	30	15	42	152	6 / 120
453532S	1	36	30	15	42	164	6 / 120
453534S	1-1/16	38	30	16	44	180	6 / 120
453536S	1-1/8	41	30	17	44	199	6 / 120
453538S	1-3/16	42	30.5	17	44	208	6 / 120
453540S	1-1/4	46	30	18	44	237	6 / 120

Impact Socket Set

4472MP

4472SP

1/2"

- Standard impact socket
- Stand size (mm) : 415 x 336 x 320



4472MP / 4472SP

KT NO.	PC.	Contents	Each Q'ty	
4472MP	158		8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20, 21	6
			22, 23, 24	7
			25, 26, 27, 28	6
			29, 30, 32	5
4472SP	106		5/16, 3/8, 7/16, 1/2, 9/16	8
			5/8, 11/16, 3/4, 13/16	6
			7/8, 15/16,	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5

KT NO.	Spec.	kg	Cuft
4472MP-A	87103	6.37	0.67
4472MP-D	158 PC. socket content	19.63	0.54
4472SP-A	87103	6.37	0.67
4472SP-D	106 PC. socket content	20.4	0.37

Deep Impact Socket


KT No. & D1



4430M

1/2"

• DIN 3121




KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
443008M	8	15.0	24.8	12	78	125	6 / 120
443009M	9	16.3	24.8	12	78	135	6 / 120
443010M	10	17.6	24.8	12	80	153	6 / 120
443011M	11	18.8	24.8	13	80	150	6 / 120
443012M	12	20.0	24.8	14	80	166	6 / 120
443013M	13	21.2	24.8	14	80	158	6 / 120
443014M	14	22.5	24.8	14	80	172	6 / 120
443015M	15	23.8	29.8	16	80	233	6 / 96
443016M	16	25.0	29.8	16	80	232	6 / 96
443017M	17	26.2	29.8	16	80	240	6 / 96
443018M	18	27.5	29.8	17	80	253	6 / 96
443019M	19	28.8	29.8	18	80	272	6 / 96
443020M	20	29.5	29.8	20	80	253	6 / 96
443021M	21	29.8	29.8	20	80	254	6 / 96
443022M	22	32.4	30.0	22	80	296	5 / 60
443023M	23	33.2	30.0	24	80	291	5 / 60
443024M	24	34.4	30.0	24	80	299	5 / 60
443027M	27	38.0	30.0	27	80	343	5 / 60
443030M	30	42.0	30.5	30	80	397	5 / 50
443032M	32	46.0	30.0	32	80	454	1 / 24
443036M	36	47.0	30.0	36	80	422	1 / 24

4430S

1/2"

• ANSI / ASME B107.2




KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg
443020S	5/8	24.0	24.8	16	80	179	6 / 96
443024S	3/4	28.8	29.8	18	80	258	6 / 96
443028S	7/8	32.0	30.0	22	80	284	5 / 60
443030S	15/16	34.0	30.0	24	80	297	5 / 60
443032S	1	36.0	30.0	24	80	328	5 / 60
443034S	1-1/16	38.0	30.0	27	80	340	5 / 60
443036S	1-1/8	41.0	30.0	27	80	394	5 / 50
443040S	1-1/4	46.0	30.0	32	80	477	1 / 24
443042S	1-5/16	46.0	30.0	34	80	440	1 / 24
443048S	1-1/2	50.0	30.0	34	80	454	1 / 24

4435M

1/2"

• DIN 3121




KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
443508M	8	15.0	24.8	12	78	124	6 / 120
443509M	9	16.3	24.8	12	78	137	6 / 120
443510M	10	17.6	24.8	12	80	149	6 / 120
443511M	11	18.8	24.8	13	80	153	6 / 120
443512M	12	20.0	24.8	14	80	164	6 / 120
443513M	13	21.2	24.8	14	80	169	6 / 120
443514M	14	22.5	24.8	14	80	168	6 / 120
443515M	15	23.8	29.8	16	80	225	6 / 96
443516M	16	25.0	29.8	16	80	233	6 / 96
443517M	17	26.2	29.8	16	80	239	6 / 96
443518M	18	27.5	29.8	17	80	246	6 / 96
443519M	19	28.8	29.8	18	80	254	6 / 96
443520M	20	29.0	29.8	20	80	244	6 / 96
443521M	21	29.8	29.8	20	80	247	6 / 96
443522M	22	31.8	30.0	22	80	278	5 / 60
443523M	23	33.8	30.0	24	80	316	5 / 60
443524M	24	33.8	30.0	24	80	297	5 / 60
443525M	25	35.8	30.0	24	80	326	5 / 60
443526M	26	37.8	30.0	27	80	367	5 / 60
443527M	27	37.8	30.0	27	80	364	5 / 60
443528M	28	39.8	30.0	27	80	424	5 / 50
443529M	29	39.8	30.0	27	80	407	5 / 50
443530M	30	41.8	30.5	30	80	422	5 / 50
443532M	32	46.0	30.0	32	80	503	1 / 24
443533M	33	46.0	30.0	32	80	471	1 / 24
443534M	34	46.0	30.0	33	80	466	1 / 24
443536M	36	47.0	30.0	36	80	445	1 / 24
443538M	38	50.0	30.0	38	80	515	1 / 24
443541M	41	56.0	30.0	38	80	689	1 / 24
443546M	46	64.0	30.0	40	80	943	1 / 24

4435S

1/2"

• ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg
443510S	5/16	14.0	24.8	12	78	123	6 / 120
443512S	3/8	17.0	24.8	12	80	151	6 / 120
443514S	7/16	18.0	24.8	13	80	151	6 / 120
443516S	1/2	20.0	24.8	14	80	157	6 / 120
443518S	9/16	22.0	24.8	14	80	175	6 / 120
443520S	5/8	24.0	24.8	16	80	182	6 / 96
443522S	11/16	26.0	29.8	17	80	247	6 / 96
443524S	3/4	28.8	29.8	18	80	254	6 / 96
443526S	13/16	29.8	29.8	20	80	263	6 / 96
443528S	7/8	32.0	30.0	22	80	294	5 / 60
443530S	15/16	34.0	30.0	24	80	308	5 / 60
443532S	1	36.0	30.0	24	80	337	5 / 60



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
443534S	1-1/16	38.0	30.0	27	80	364	5 / 60
443536S	1-1/8	41.0	30.0	27	80	407	5 / 50
443538S	1-3/16	42.0	30.5	30	80	418	5 / 50
443540S	1-1/4	46.0	30.0	32	80	499	1 / 24
443542S	1-5/16	46.0	30.0	34	80	471	1 / 24

Impact Socket Set

4466MP

4466SP

1/2"

- Deep impact socket
- Stand size (mm) :
415 x 336 x 320



4466MP / 4466SP

KT NO.	PC.	Contents	Each Q'ty	
4466MP	166	4435M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20	7
			21, 22, 23, 24	7
			25, 26, 27, 28, 29	6
			30, 32	5
4466SP	110	4435S	5/16, 3/8, 7/16,	8
			1/2, 9/16	8
			5/8, 11/16, 3/4,	7
			13/16, 7/8, 15/16	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5

Packing NO.	Spec.		Cuff
4466MP-A	87103	5.87	0.54
4466MP-DA	166 PC. socket content	21.63	0.44
4466MP-DB		23.40	0.37
4466SP-A	87103	6.37	0.67
4466SP-D	110 PC. socket content	28.0	0.47


Impact Thin Wall Socket

KT No. & D1

4835M

1/2"

- DIN 3121




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
483510M	10	16	25.0	20	52	93	10 / 180
483511M	11	17	25.0	20	52	88	10 / 180
483512M	12	18	25.0	20	52	92	10 / 180
483513M	13	19	25.0	20	52	95	10 / 180
483514M	14	21	25.0	20	52	99	10 / 180
483516M	16	23	25.0	20	52	101	8 / 80
483517M	17	25	25.0	23	52	106	8 / 80
483519M	19	27	30.0	23	52	150	8 / 80
483521M	21	29	30.0	25	52	142	8 / 80
483522M	22	31	30.0	25	52	158	8 / 80
483523M	23	32	30.0	26	52	172	8 / 80
483524M	24	33	30.0	26	52	165	8 / 80
483526M	26	36	30.0	27	65	241	6 / 60
483527M	27	37	30.0	27	65	249	6 / 60
483530M	30	41	30.5	27	65	294	5 / 50
483535M	35	46	30.0	32	70	367	1 / 24

4930M

1/2"

- DIN 3121




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
493008M	8	13.2	25	12	78	118	6 / 120
493009M	9	14.0	25	12	78	118	6 / 120
493010M	10	15.5	25	12	80	134	6 / 120
493011M	11	16.7	25	13	80	136	6 / 120
493012M	12	18.0	25	14	80	142	6 / 120
493013M	13	19.0	25	14	80	165	6 / 120
493014M	14	20.5	25	14	80	153	6 / 120
493015M	15	21.5	30	16	80	204	6 / 96
493016M	16	23.0	30	16	80	219	6 / 96
493017M	17	24.5	30	16	80	218	6 / 96
493018M	18	25.5	30	17	80	267	6 / 96
493019M	19	27.0	30	18	80	241	6 / 96
493020M	20	28.0	30	20	80	235	6 / 96
493021M	21	29.0	30	20	80	241	6 / 96
493022M	22	30.5	30	22	80	252	5 / 60
493023M	23	32.0	30	24	80	267	5 / 60
493024M	24	33.0	30	24	80	277	5 / 60
493027M	27	37.0	30	27	80	318	5 / 60
493030M	30	40.5	30	30	80	355	5 / 50
493032M	32	42.5	30	32	80	356	5 / 50
493036M	36	45.5	30	36	80	361	1 / 24

4935M

1/2"

- DIN 3121




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
493510M	10	15.5	25	12	80	133	6 / 120
493511M	11	16.7	25	13	80	134	6 / 120
493512M	12	18.0	25	14	80	140	6 / 120
493513M	13	19.0	25	14	80	142	6 / 120
493514M	14	20.5	25	14	80	142	6 / 120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
493516M	16	23.0	30	16	80	201	6 / 96
493517M	17	24.5	30	16	80	211	6 / 96
493519M	19	27.0	30	18	80	222	6 / 96
493521M	21	29.0	30	20	80	230	6 / 96
493522M	22	30.5	30	22	80	261	5 / 60
493523M	23	32.0	30	24	80	273	5 / 60
493524M	24	33.0	30	24	80	285	5 / 60
493526M	26	35.5	30	27	80	303	5 / 60
493527M	27	37.0	30	27	80	335	5 / 60
493530M	30	40.5	30	30	80	376	5 / 50

Impact Thin Wall Socket

4935S

- ANSI / ASME B107.2




KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
493510S	5/16	13.0	25.0	12	80	129	6 / 120
493512S	3/8	16.0	25.0	12	80	144	6 / 120
493514S	7/16	16.7	25.0	13	80	148	6 / 120
493516S	1/2	19.0	25.0	14	80	159	6 / 120
493518S	9/16	20.5	25.0	14	80	165	6 / 120
493520S	5/8	23.0	25.0	16	80	167	6 / 96
493522S	11/16	24.5	30.0	17	80	235	6 / 96
493524S	3/4	27.0	30.0	18	80	224	6 / 96
493526S	13/16	29.0	30.0	20	80	250	6 / 96
493528S	7/8	30.5	30.0	22	80	260	5 / 60
493530S	15/16	33.0	30.0	24	80	336	5 / 60
493532S	1	34.0	30.0	24	80	356	5 / 60
493534S	1-1/16	37.0	30.0	27	80	405	5 / 60
493536S	1-1/8	39.0	30.5	27	80	355	5 / 50
493538S	1-3/16	40.5	30.0	30	80	417	5 / 50
493540S	1-1/4	42.5	30.0	32	80	389	5 / 50

Extra Thin Wall Impact Socket

4415M

- Finishing - phosphate sunk
- For aluminum alloy wheel
- Material - chrome molybdenum alloy steel
- Super thin wall version has less strength than a standard deep one
- DIN 3121

Thin walled design (D1)




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
441517M	17	23.8	25	17	80	163	6 / 96
441519M	19	25.8	30	20	80	214	6 / 96
441521M	21	27.8	30	22	80	221	6 / 96
441522M	22	29.5	30	24	80	238	6 / 96

Wheel Nut Impact Socket

- Material - chrome molybdenum alloy steel
- Durable outer sleeve protects polished wheels and lug nuts
- Plastic sleeve thin wall version




4945M



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
494515M	15	25.0	26.0	25	85	160	5 / 60
494517M	17	27.3	30.0	26	85	213	5 / 60
494519M	19	29.3	30.0	26	85	232	5 / 60
494521M	21	30.9	30.0	26	85	243	5 / 60
494522M	22	32.0	31.5	25	85	266	5 / 60

4955MX

- Plastic insert to protect the surface of the wheel rim
- 17MX: Especially for wheel mounting and dismounting on AMG-rims and/or alloy rims with deeply located wheel bolts
- 19MX: Particularly suitable for wheel mounting and assembly on SUVs e.g. PORSCHE Cayenne, Macan, AUDI Q7, Q5, VW Touareg
- 21MX: Particularly for wheel mounting and installation of aluminium rims to HYUNDAI, KIA, TOYOTA, MAZDA, TESLA




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
495517MX	17	27.3	30	25	150	310	2 / 48
495519MX	19	29.3	30	25	150	339	2 / 48
495521MX	21	30.9	30	25	150	413	2 / 48

Double - Ended Impact Socket

4915M

4915S



KT NO.	mm / inch	D1 mm	D2 mm	L mm	L1 mm	L2 mm		
49151719M	17 x 19	26	28	77	22	26	210	6 / 96
49151921M	19 x 21	26	28	77	23	26	200	6 / 96
49152122M	21 x 22	30	32	77	20	26	310	5 / 60
49152123M	21 x 23	30	32	77	22	26	310	5 / 60
49152426S	3/4" x 13/16"	26	28	77	23	26	200	6 / 96


Impact Star Socket

4575M

1/2"

- For torx external screw
- DIN 3121

KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	⚖	📦
457510M	E10	14.0	25.0	7.5	38	68	10 / 200
457512M	E12	15.9	25.0	9.0	38	68	10 / 200
457514M	E14	17.7	25.0	10.0	38	71	10 / 200
457516M	E16	20.0	25.0	11.0	38	75	10 / 200
457518M	E18	22.0	25.0	12.5	38	78	10 / 200
457520M	E20	24.5	30.0	14.0	38	120	10 / 160



Impact Bit Socket

4015M

4015S 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N-m	⚖	📦
401505M	H5	80	36.0	73	6 / 120
401506M	H6	80	62.4	77	6 / 120
401507M	H7	80	97.0	84	6 / 120
401508M	H8	80	144.0	86	6 / 120
401509M	H9	80	229.0	97	6 / 120
401510M	H10	80	264.0	100	6 / 120
401512M	H12	80	480.0	117	6 / 120
401513M	H13	80	518.0	128	6 / 120
401514M	H14	80	650.0	137	6 / 120
401517M	H17	80	715.0	217	6 / 96
401519M	H19	80	786.0	246	6 / 96

KT NO.	inch	L mm	Max. torq N-m	⚖	📦
401508S	1/4	80	93.6	77	6 / 120
401510S	5/16	80	144.0	86	6 / 120
401512S	3/8	80	264.0	100	6 / 120
401516S	1/2	80	518.0	126	6 / 120

4053

4063 1/2"

- For torx internal screw
- DIN 3121



KT NO.	Size	L mm	⚖	📦
405320	T20	60	64	10 / 180
405325	T25	60	65	10 / 180
405327	T27	60	66	10 / 180
405330	T30	60	66	10 / 180
405340	T40	60	68	10 / 180
405345	T45	60	73	10 / 180
405350	T50	60	78	10 / 180
405355	T55	60	87	10 / 180
405360	T60	60	93	10 / 180
405370	T70	60	104	10 / 180
406325	T25	100	72	6 / 120
406327	T27	100	76	6 / 120
406330	T30	100	78	6 / 120
406340	T40	100	81	6 / 120
406345	T45	100	88	6 / 120
406350	T50	100	97	6 / 120
406355	T55	100	117	6 / 120
406360	T60	100	137	6 / 120

4055M

4055S 1/2"

- Hexagon head
- DIN 3121

- Hexagon head
- ANSI / ASME B107.2



KT NO.	mm	L mm	Max. torq N-m	⚖	📦
405504M	H4	60	20.8	64	10 / 180
405505M	H5	60	36.0	67	10 / 180
405506M	H6	60	62.4	71	10 / 180
405507M	H7	60	97.0	74	10 / 180
405508M	H8	60	144.0	79	10 / 180
405510M	H10	60	264.0	87	10 / 180
405512M	H12	60	480.0	98	10 / 180
405513M	H13	60	518.0	104	10 / 180
405514M	H14	60	650.0	110	10 / 180
405516M	H16	60	680.0	125	10 / 180
405517M	H17	60	715.0	178	10 / 80
405518M	H18	60	740.0	186	10 / 80
405519M	H19	60	786.0	195	10 / 80

KT NO.	inch	L mm	Max. torq N-m	⚖	📦
405506S	3/16	60	36.0	65	10 / 180
405508S	1/4	60	93.6	72	10 / 180
405510S	5/16	60	144.0	78	10 / 180
405512S	3/8	60	264.0	86	10 / 180
405514S	7/16	60	420.0	93	10 / 180
405516S	1/2	60	518.0	104	10 / 180

4056M

1/2"

- Spline head
- DIN 3121



KT NO.	Size	L mm	Max. torq N-m	⚖	📦
405608M	M 8	60	62.4	73	10 / 180
405610M	M10	60	144.0	81	10 / 180
405612M	M12	60	229.0	88	10 / 180

Impact Universal Joint Socket

4B55M 4B55S 1/2"

- Special design for confined spaces
- DIN 3121



• Standard Length

KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
4B5510M	10	17.0	27.5	12	64	167	10 / 120
4B5511M	11	19.0	27.5	12	64	166	10 / 120
4B5512M	12	19.0	27.5	12	64	165	10 / 120
4B5513M	13	21.8	27.5	12	64	171	10 / 120
4B5514M	14	22.0	27.5	12	64	178	10 / 120
4B5515M	15	22.0	27.5	12	64	175	10 / 120
4B5516M	16	23.9	27.5	12	64	182	10 / 120
4B5517M	17	25.0	27.5	12	64	190	10 / 120
4B5521M	21	30.0	27.5	12	64	202	10 / 120
4B5522M	22	31.7	27.5	12	64	208	10 / 120

KT NO.	Inch	D1 mm	D2 mm	l mm	L mm	g	kg
4B5512S	3/8	17.0	27.5	12	64	161	10 / 120
4B5514S	7/16	19.0	27.5	12	64	166	10 / 120
4B5516S	1/2	21.8	27.5	12	64	176	10 / 120
4B5518S	9/16	22.0	27.5	12	64	174	10 / 120
4B5520S	5/8	23.9	27.5	12	64	180	10 / 120
4B5522S	11/16	25.0	27.5	12	64	173	10 / 120
4B5526S	13/16	30.0	27.5	12	64	190	10 / 120
4B5528S	7/8	31.7	27.5	12	64	196	10 / 120
4B5530S	15/16	35.8	27.5	12	64	217	6 / 96

Impact Accessory

4147 1/2"

- Bit holder
- DIN 3121



KT NO.	Size	Overall length mm	g	kg
414708S	1/4"	48	73	12 / 216
414710S	5/16"	48	79	12 / 216
414710M	10 mm	48	79	12 / 216

414A08S 1/2"

- Quick-release
- Bit holder
- DIN 3121



KT NO.	Size	Overall length mm	g	kg
414A08S	1/4"	50	93.6	10 / 180

4260P 1/2"

- Extension bar
- DIN 3121



KT NO.	Overall length Inch	Overall length mm	g	kg
4260-03P	3	75	198	4 / 80
4260-04P	4	100	240	4 / 80
4260-05P	5	125	278	2 / 40
4260-06P	6	150	324	4 / 80
4260-08P	8	200	402	4 / 48
4260-10P	10	250	487	4 / 48
4260-12P	12	300	573	2 / 40
4260-16P	16	400	746	2 / 20

Impact Bit Socket


KT No. & D1



- Air pressure must not exceed 90PSI (6.3bar)
- Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

1740 409616M 1/2"

- Hex bit & bit holder
- DIN 3121

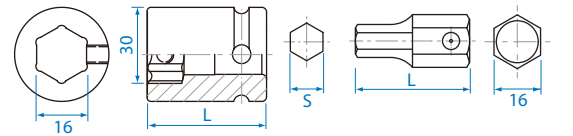

KT NO.	mm	L mm	Max. torq N-m	g	kg
174010H	H10	40	264.0	46	20 / 400
174012H	H12	40	480.0	52	20 / 400
174014H	H14	40	684.0	60	20 / 200
174017H	H17	40	680.0	73	20 / 200
174019H	H19	40	680.0	80	20 / 200
174022H	H22	40	680.0	97	12 / 120
409616M	16	38	680.0	145	10 / 160

4065M 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N-m	g	kg
406504M	H4	100	20.8	73	6 / 120
406505M	H5	100	36.0	78	6 / 120
406506M	H6	100	62.4	85	6 / 120
406508M	H8	100	144.0	95	6 / 120
406510M	H10	100	264.0	114	6 / 120
406512M	H12	100	480.0	138	6 / 120
406514M	H14	100	650.0	164	6 / 120

4075M 1/2"

- Hexagon head
- DIN 3121














KT NO.	mm	L mm	Max. torq N-m	g	kg
407505M	H5	150	36.0	115	6 / 120
407506M	H6	150	62.4	115	6 / 120
407508M	H8	150	144.0	116	6 / 120
407510M	H10	150	264.0	148	6 / 120
407512M	H12	150	480.0	187	6 / 120
407514M	H14	150	650.0	231	6 / 120

Impact Accessory & Set

4269

1/2"


- Torque extension bar
- Color coded and engraved with N-m and lbf-ft setting
- Helps to eliminate overtorqued lug nut

KT NO.	Color	Max. torq N-m	lbf-ft	Overall length inch	mm	
4269-08-90		90	65	7-11/16	195	192
4269-08-A0		100	75	7-11/16	195	201
4269-08-B0		110	80	7-11/16	195	217
4269-08-C0		120	90	7-11/16	195	224
4269-08-D5		135	100	7-11/16	195	238
4269-08-F0		150	110	7-11/16	195	263
4269-08-G0		160	120	7-11/16	195	304
4269-08-H5		175	130	7-11/16	195	284
4269-08-J0		190	140	7-11/16	195	331
4269-08-K0		200	150	7-11/16	195	344



How to use torque extension bar



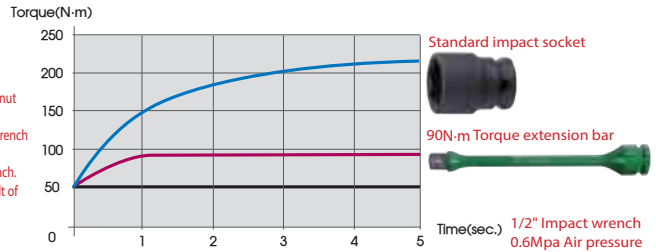









1. Use with 1/2"DR. impact wrench, don't use by hand.
2. Set air pressure 0.6 MPa(90 PSI) and adjust torque value between 190 N-m and 210 N-m.
3. Select suitable torque extension bar according to wheel nut size and indicated tightening torque.
4. Attach the torque extension bar with socket to impact wrench and apply load.
5. Check the actual tightening torque value by torque wrench.
6. Adjust air pressure or torque value according to the result of above.
7. Tight other wheel nuts in diagonal order.



4481PP1

1/2"

- Torque extension bar set

Contents	 2.58	 1 / 6
 4269-08-90	90 N-m	
 4269-08-A0	100 N-m	
 4269-08-B0	110 N-m	
 4269-08-C0	120 N-m	
 4269-08-D5	135 N-m	
 4269-08-F0	150 N-m	
 4269-08-G0	160 N-m	
 4269-08-H5	175 N-m	
 4269-08-J0	190 N-m	
 4269-08-K0	200 N-m	




10 PC.

9TE41

- Hook for torque extension bar
- Groove capacity : 22 mm




KT NO.	Overall length (mm)		
9TE41	311	196.4	1 / 24



4796P 1/2"


- Universal joint
- DIN 3121



KT NO.	Overall length Inch	mm	D mm		
4796P	2-3/8	59	25	124	6 / 96

4797P 1/2"


- Universal joint
- DIN 3121



KT NO.	Overall length Inch	mm	D mm		
4797P	2-1/2	65	29.1	168	6 / 96

4798P 1/2"


- Universal joint



KT NO.	Overall length Inch	mm	D mm	D1 mm		
4798P	3	74	29.1	29.1	213	6 / 96

4799P 1/2"


- Universal joint
- Durable pinless hex ball locking design
- DIN 3121



KT NO.	Overall length Inch	mm	D mm		
4799P	2-3/8	60	30	170	6 / 96

4873P 1/2"


- Adapter
- Convert to 3/8"
- 4873P → Max. torque : 202 N·m
- DIN 3121



KT NO.	Spec.	D mm		
4873P	1/2"F x 3/8"M	25	66	10 / 160

4863P 1/2"

- Adapter
- Convert to 3/8", 3/4" drive
- 4863P → Max. torque : 202 N·m
- DIN 3121



4863P & 4866P


KT NO.	Spec.		
4863P	1/2"F x 3/8"M	97	10 / 160
4866P	1/2"F x 3/4"M	147	8 / 160

90401 1/2"

- Locking ring
- High tensile rubber material

90601 1/2"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90401
90402



90601
90602

KT NO. Type \varnothing d / ℓ Applied to socket sizes

90401	ring	3.5	19	4535M (8~14mm)	4535S (15/16"~9/16")
				4435M (8~14mm)	4435S (15/16"~9/16")
				4015M (5~14mm)	4015S (1/4"~1/2")
				4055M (4~14mm)	4055S (3/16"~1/2")
				4935M (10~14mm)	4935S (7/16"~9/16")
				4415M (17mm)	4575 (E10-E18)
				4835M (10~17mm)	
90601	pin	3.0	20	414A08S.4053.4063.4065.4075.4873.4015 4147.4055.4056	
90402	ring	3.5	23	4535M (15~46mm)	4535S (11/16"~1-1/4")
				4435M (15~46mm)	4435S (5/8"~1-1/4")
				4935M (16~30mm)	4935S (11/16"~1-1/4")
				4015M (17.19mm)	
				4415M (19.21mm)	
				4530M (15~36mm)	
				4575M (E20)	
90602	pin	3.0	25	4835M (19~30mm)	
				4260.4796.4797.4863.4873.4866	



Impact Socket Rail Set

4423MP

1/2"

- Thin wall version

3
PC.

Contents

0.45 48

4835M 17, 19, 21

7411PP

1/2"

11
PC.

Contents

0.76 4 / 32

3575M E5, E6, E7, E8

4575M E10, E12, E14, E16, E18, E20


4863P 1/2"F x 3/8"M

Impact Socket Set

4408MP

1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)

8
PC.

Contents

1.3 1 / 20

4535M 10, 12, 13, 14, 17, 19, 21, 24

Impact Socket Set

4408SP

1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)

8
PC.

Contents


1.3 1 / 20

4535S 3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 15/16

4412MP

1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)

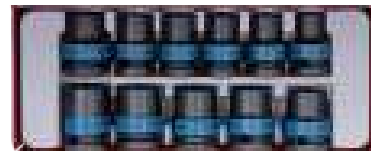11
PC.

Contents

1.61 1 / 8


4535M 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21

4414MP


4414SP

1/2"

Metal case size (mm) :
270 x 100 x 49 (0.047 cuft)

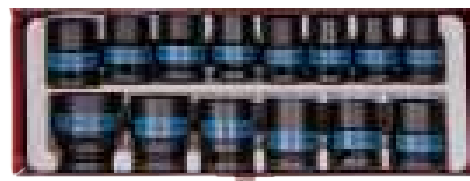

4414MP

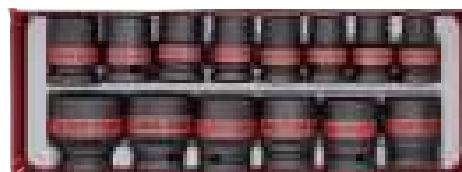14
PC.

4414SP

KT NO.

Contents

4414MP

4535M

10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27

2.25

4414SP

4535S

3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4

2.4

1 / 8

Impact Socket Set

4419MP

1/2"

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)

19
PC.

Contents

2.7 1 / 6

	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 26, 27, 30, 32
	4260-05P	



4410MP

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)

4410MP01

4410SP

1/2"

8
PC.



4410MP / 4410MP01



4410SP

KT NO.

Contents

2.3 1 / 12

4410MP	4435M	12, 13, 14, 17, 19, 21, 22, 23
4410MP01	4435M	12, 13, 14, 17, 19, 21, 22, 24
4410SP	4435S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16

4416SP

1/2"

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)

14
PC.



Contents

4.8 1 / 6

	4435S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4
--	-------	-----------------------------------------------------------------------------------------

4413MP

1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)

8
PC.



Contents

1.37 1 / 20

	4835M	10, 12, 13, 14, 17, 19, 21, 24
--	-------	--------------------------------

4415MP

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)


4415MP03

1/2"

15
PC.



4415MP

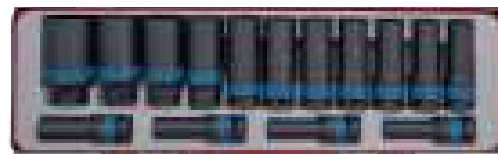

4415MP03

KT NO.

Contents

4.9 1 / 6

4415MP		10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32
4415MP03	4435M	10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32

Impact Socket Set

4815MP04

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)



4815MP05

1/2"



15
PC.

4815MP04 / 4815MP05

KT NO.		Contents	Kg	1/6
4815MP04		10, 12, 13, 14, 15, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	5.1	1 / 6
4815MP05	 4430M	8, 9, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	4.3	1 / 6

Wheel Nut Impact Socket Set

44905MP







1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Blow case size (mm) :
149 x 132 x 45 (0.031 cuft)



3
PC.

Contents	Kg	0.89	1/16
  494517M 17 mm			
  494519M 19 mm			
  494521M 21 mm			

Impact Socket Set

44906MP










1/2"

- Wheel nut impact socket
- Torque extension bar

Metal case size (mm) :
296 x 130 x 41 (0.056 cuft)



6
PC.

Contents	Kg	2.13	1/10
  494517M 17 mm			
  494519M 19 mm			
  494521M 21 mm			
 4269-08-90 90 N-m			
 4269-08-B0 110 N-m			
 4269-08-D5 135 N-m			

Wheel Nut Impact Socket Set

44904MP

1/2"


- Material - chrome molybdenum alloy steel
- Idling type protective sleeve design, reduce sheath wear and avoid damage to aluminum alloy rims
- With color management, easy to recognize the sizes









Blow case size (mm) :
160 x 135 x 50 (0.038 cuft)

Kg 1.06 1/20



4
PC.



Contents	DR.	Applicable vehicle	Size mm	L mm
  494515M 1/2" Smart 15 85.0				
  494522M 1/2" Opel 22 85.0				
  9BW4501 1/2" Mercedes Benz 17 85.5				
  9BW4502 1/2" Hyundai/Kia 21 85.5				

4405MXL







1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Blow case size (mm) :
206 x 147 x 50 (0.053 cuft)



3
PC.

Contents	Kg	1.20	1/20
  495517MX 17 mm, 150mmL			
  495519MX 19 mm, 150mmL			
  495521MX 21 mm, 150mmL			

Impact Bit Socket Set

4407MP

1/2"

- For hexagon head screw
- 60mmL
- Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)



7
PC.

Contents


0.94 1 / 20

4055M H4, H5, H6, H8, H10, H12, H14

4457MP

1/2"

- For hexagon head screw
- 100mmL
- Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



7
PC.

Contents

1.44 1 / 18

4065M H4, H5, H6, H8, H10, H12, H14

4476MP

1/2"

- For hexagon head screw
- 150mmL
- Metal case size (mm) :
244 x 118 x 37(0.038 cuft)



6
PC.

Contents

1.47 1 / 18

4075M H5, H6, H8, H10, H12, H14

4418MP

1/2"

- For hexagon head screw
- 60mmL
- Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8
PC.

Contents

1.34 1 / 20

4055M H5, H6, H8, H10, H12, H14, H17, H19

4417PP

1/2"

- For torx internal screw
- 60mmL
- Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)



7
PC.

Contents

0.94 1 / 20

4053 T25, T30, T40, T45, T50, T55, T60

4467PP

1/2"

- For torx internal screw
- 100mmL
- Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



7
PC.

Contents

1.31 1 / 18

4063 T25, T30, T40, T45, T50, T55, T60

Standard Impact Socket


KT No. & D1



6510M


3/4"

- Lightweight type
- DIN 3121



KT NO.	mm	D1 mm	D2 mm	l mm	L mm		
651017M	17	29.0	38	10	50	225	8 / 96
651018M	18	30.0	38	10	50	230	8 / 96
651019M	19	32.0	38	10	50	240	8 / 96
651021M	21	35.0	38	13	50	252	8 / 96
651022M	22	36.0	38	13	50	255	8 / 96
651023M	23	37.0	38	15	50	256	8 / 96
651024M	24	38.0	38	15	50	265	8 / 96
651026M	26	38.0	38	15	53	257	6 / 48
651027M	27	42.0	38	18	53	299	6 / 48
651028M	28	44.0	38	18	53	325	6 / 48
651029M	29	45.0	38	18	53	330	6 / 48
651030M	30	46.0	38	20	53	337	6 / 48


Standard Impact Socket



KT No. & D1 

6515M

3/4"

- Lightweight type
- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
651514M	14	25.0	38	10	50	206	8 / 96
651515M	15	26.0	38	10	50	210	8 / 96
651516M	16	27.5	38	10	50	216	8 / 96
651517M	17	29.0	38	10	50	228	8 / 96
651518M	18	30.0	38	10	50	232	8 / 96
651519M	19	32.0	38	10	50	241	8 / 96
651521M	21	35.0	38	13	50	254	8 / 96
651522M	22	36.0	38	13	50	260	8 / 96
651523M	23	37.0	38	15	50	261	8 / 96
651524M	24	38.0	38	15	50	265	8 / 96
651525M	25	38.0	38	15	53	275	8 / 96
651526M	26	38.0	38	15	53	259	6 / 48
651527M	27	42.0	38	18	53	311	6 / 48
651528M	28	44.0	38	18	53	332	6 / 48
651529M	29	45.0	38	18	53	345	6 / 48
651530M	30	46.0	38	20	53	348	6 / 48

6535M

3/4"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
653513M	13	22.0	38	16	50	205	8 / 96
653517M	17	29.0	44	10	50	309	6 / 48
653518M	18	30.0	44	10	50	314	6 / 48
653519M	19	32.0	44	10	50	323	6 / 48
653521M	21	35.0	44	13	50	336	6 / 48
653522M	22	36.0	44	13	50	340	6 / 48
653523M	23	37.0	44	15	50	339	6 / 48
653524M	24	38.0	44	15	50	343	6 / 48
653526M	26	40.0	44	15	53	364	6 / 48
653527M	27	42.0	44	18	53	379	6 / 48
653528M	28	44.0	44	18	53	390	6 / 48
653529M	29	45.0	44	18	53	399	6 / 48
653530M	30	46.0	44	20	53	349	6 / 48
653531M	31	47.0	44	20	53	413	6 / 48
653532M	32	48.0	44	20	57	456	6 / 36
653533M	33	50.0	44	20	57	481	6 / 36
653534M	34	51.0	44	22	57	488	6 / 36
653535M	35	52.0	44	22	57	499	6 / 36
653536M	36	53.0	44	22	57	508	6 / 36
653538M	38	56.0	44	22	57	553	4 / 32
653540M	40	58.0	44	22	58	590	4 / 32
653541M	41	59.0	44	24	58	584	4 / 32
653542M	42	61.0	44	24	58	622	2 / 24
653543M	43	62.0	44	24	58	638	2 / 24
653544M	44	64.0	44	24	62	706	2 / 24
653545M	45	64.0	44	24	62	704	2 / 24
653546M	46	66.0	44	24	62	730	2 / 24
653548M	48	68.0	44	26	65	807	2 / 24
653550M	50	71.0	44	26	65	870	1 / 20
653552M	52	74.0	54	30	68	1083	1 / 20
653554M	54	76.0	54	30	68	1151	1 / 20
653555M	55	77.0	54	30	70	1196	1 / 20
653557M	57	79.0	54	32	70	1211	1 / 20
653558M	58	81.0	54	32	70	1275	1 / 20
653560M	60	84.0	54	32	70	1424	1 / 20
653563M	63	83.5	54	40	80	1317	1 / 12
653565M	65	85.5	54	43	80	1324	1 / 12
653570M	70	92.0	54	45	83	1571	1 / 12

6530M

3/4"

- DIN 3129, ISO 2725-2



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
653017M	17	29.0	44	10	50	319	6 / 48
653019M	19	32.0	44	10	50	322	6 / 48
653021M	21	35.0	44	13	50	333	6 / 48
653022M	22	36.0	44	13	50	335	6 / 48
653023M	23	37.0	44	15	50	335	6 / 48
653024M	24	38.0	44	15	50	338	6 / 48
653026M	26	40.0	44	15	53	360	6 / 48
653027M	27	42.0	44	18	53	361	6 / 48
653028M	28	44.0	44	18	53	384	6 / 48
653029M	29	45.0	44	18	53	387	6 / 48
653030M	30	46.0	44	20	53	390	6 / 48
653032M	32	48.0	44	20	57	440	6 / 36
653033M	33	50.0	44	20	57	476	6 / 36
653034M	34	51.0	44	22	57	479	6 / 36
653035M	35	52.0	44	22	57	488	6 / 36
653036M	36	53.0	44	22	57	489	6 / 36
653038M	38	56.0	44	22	57	534	4 / 32
653040M	40	58.0	44	22	58	577	4 / 32
653041M	41	59.0	44	24	58	573	4 / 32
653042M	42	61.0	44	24	58	610	2 / 24
653046M	46	66.0	44	24	62	723	2 / 24
653063M	63	84.5	54	40	80	1352	1 / 12
653065M	65	86.5	54	43	80	1381	1 / 12
653070M	70	92.0	54	45	83	1445	1 / 12

Standard Impact Socket

KT No. & D1




6535S

3/4"

ANSI / ASME B107.2

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	kg
653522S	11/16	29	38	10	50	226	8 / 96
653524S	3/4	32	38	10	50	240	8 / 96
653526S	13/16	35	38	13	50	254	8 / 96
653528S	7/8	36	38	13	50	259	8 / 96
653530S	15/16	37	38	15	50	256	8 / 96
653532S	1	38	38	15	53	274	8 / 96
653534S	1-1/16	42	40	18	53	328	6 / 48
653536S	1-1/8	44.7	40	18	53	360	6 / 48
653538S	1-3/16	46	40	20	53	368	6 / 48
653540S	1-1/4	48	44	20	57	459	6 / 36
653542S	1-5/16	50	44	20	57	485	6 / 36
653544S	1-3/8	52	44	22	57	495	6 / 36
653546S	1-7/16	54	44	22	57	526	6 / 36
653548S	1-1/2	56	44	22	57	545	4 / 32
653550S	1-9/16	58	44	22	58	596	4 / 32
653552S	1-5/8	59	44	24	58	588	4 / 32
653554S	1-11/16	63.5	44	25	58	681	2 / 24




KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	kg
653556S	1-3/4	64	44	25	62	710	2 / 24
653558S	1-13/16	66	44	25.5	62	718	2 / 24
653560S	1-7/8	68	44	27	65	806	2 / 24
653562S	1-15/16	70	44	27	65	951	1 / 20
653564S	2	72	54	28	68	1048	1 / 20
653566S	2-1/16	74	54	30	68	1078	1 / 20
653568S	2-1/8	76	54	30	68	1142	1 / 20
653570S	2-3/16	77	54	30.5	70	1141	1 / 20
653572S	2-1/4	79	54	32.5	70	1178	1 / 20
653574S	2-5/16	81	54	32.5	70	1266	1 / 20
653576S	2-3/8	84	54	33.5	70	1346	1 / 20

Deep Impact Socket

6435M

3/4"

DIN 3121




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg
643519M	19	32	44	16	90	546	1 / 24
643521M	21	35	44	18	90	567	1 / 24
643522M	22	36	44	18	90	578	1 / 24
643523M	23	37	44	23	90	596	1 / 24
643524M	24	38	44	23	90	598	1 / 24
643525M	25	40	44	25	90	630	1 / 24
643526M	26	40	44	25	90	600	1 / 24
643527M	27	42	44	27	90	625	1 / 24
643528M	28	44	44	27	90	666	1 / 24
643529M	29	45	44	27	90	666	1 / 24
643530M	30	46	44	27	90	693	1 / 24
643532M	32	48	44	30	90	727	1 / 24
643533M	33	50	44	30	90	792	1 / 24
643534M	34	51	44	32	90	795	1 / 24
643535M	35	52	44	32	90	811	1 / 24
643536M	36	53	44	32	90	818	1 / 24
643538M	38	56	44	34	90	882	1 / 24
643540M	40	58	44	34	90	926	1 / 24
643541M	41	59	44	34	90	936	1 / 24
643542M	42	61	44	36	95	1047	1 / 24
643543M	43	62	44	38	95	1092	1 / 10
643544M	44	64	44	38	95	1159	1 / 10
643546M	46	66	44	38	95	1239	1 / 10
643548M	48	68	44	40	95	1218	1 / 10
643550M	50	71	44	40	95	1317	1 / 10
643555M	55	77	54	45	100	1799	1 / 10
643560M	60	84.5	54	50	100	2042	1 / 6
643565M	65	86.5	54	54	100	1904	1 / 6

6435S

3/4"

ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	kg
643524S	3/4	32	38	16	90	432	1 / 24
643526S	13/16	35	38	18	90	473	1 / 24
643528S	7/8	36	38	18	90	495	1 / 24
643530S	15/16	37	38	23	90	495	1 / 24
643532S	1	38	38	25	90	478	1 / 24
643534S	1-1/16	42	44	27	90	624	1 / 24
643536S	1-1/8	44.7	44	27	90	665	1 / 24
643538S	1-3/16	46	44	27	90	692	1 / 24
643540S	1-1/4	48	44	30	90	725	1 / 24
643542S	1-5/16	50	44	30	90	782	1 / 24
643544S	1-3/8	52	44	32	90	807	1 / 24
643546S	1-7/16	54	44	32	90	845	1 / 24
643548S	1-1/2	56	44	34	90	874	1 / 24
643550S	1-9/16	58	44	34	90	923	1 / 24
643552S	1-5/8	59	44	34	90	924	1 / 24
643554S	1-11/16	63.5	44	38	95	1181	1 / 10
643556S	1-3/4	64	44	38	95	1139	1 / 10
643558S	1-13/16	66	44	38	95	1212	1 / 10
643560S	1-7/8	68	54	40	95	1354	1 / 10
643562S	1-15/16	70	54	40	95	1256	1 / 10
643564S	2	72	54	40	95	1476	1 / 10

Thin Wall Impact Socket


KT No. & D1



6835M

3/4"

- DIN 3121




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg	1/24
683517M	17	28.0	44	16	60	346	6	48
683519M	19	30.0	44	16	60	351	6	48
683521M	21	33.0	44	18	60	369	6	48
683522M	22	34.0	44	18	60	372	6	48
683523M	23	35.0	44	23	60	373	6	48
683524M	24	36.5	44	23	60	382	6	48
683526M	26	39.0	44	25	80	397	1	24
683527M	27	40.0	44	26	80	424	1	24
683529M	29	43.0	44	26	80	455	1	24
683530M	30	44.0	44	26	80	555	1	24
683532M	32	46.5	44	26	80	512	1	24

6935M

3/4"

- DIN 3121




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg	1/24
693519M	19	30.0	44	16	90	513	1	24
693521M	21	33.0	44	18	90	546	1	24
693522M	22	34.0	44	18	90	541	1	24
693523M	23	35.0	44	23	90	519	1	24
693524M	24	36.5	44	23	90	573	1	24
693526M	26	39.0	44	25	90	578	1	24
693527M	27	40.0	44	27	90	574	1	24
693529M	29	43.0	44	27	90	578	1	24
693530M	30	44.0	44	27	90	622	1	24
693532M	32	46.5	44	30	90	683	1	24

6935S

3/4"

- ANSI / ASME B107.2




KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	kg	1/24
693524S	3/4	30.0	38	16	90	370	1	24
693526S	13/16	33.0	38	18	90	380	1	24
693528S	7/8	34.0	38	18	90	385	1	24
693530S	15/16	36.5	38	23	90	415	1	24
693532S	1	38.0	38	23	90	500	1	24
693534S	1-1/16	40.0	44	25	90	654	1	24
693536S	1-1/8	43.0	44	25	90	680	1	24
693538S	1-3/16	44.0	44	27	90	684	1	24
693540S	1-1/4	46.5	44	30	90	733	1	24

Impact Star Socket

6575M

3/4"

- For torx external screw
- DIN 3121




KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	kg	1/24
657524M	E24	32.5	44.0	17.0	50	334	6	48
657526M	E26	35.0	44.0	19.0	60	402	6	48
657528M	E28	36.5	44.0	25.5	60	401	6	48
657530M	E30	37.5	44.0	27.0	65	428	1	24
657532M	E32	39.5	44.0	29.0	65	447	1	24

Deep Impact Star Socket

6475M

3/4"

- For torx external screw
- DIN 3121
- For the operation of cylinder head bolts
- E18 application MAN M 2000 / Bus with D 08 engine
- E20 application MAN F 2000 / F 90/ F 8/ Bus with D 25 and D 28 engines
- E24 application MAN D20 engine



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	kg	1/24
647518M	E18	26.5	44.0	12.5	110	592	1	10
647520M	E20	29.0	44.0	14.0	110	627	1	10
647522M	E22	31.0	44.0	15.0	110	662	1	10
647524M	E24	32.5	44.0	17.0	110	693	1	10

Rear Wheel Socket


KT No. & D1



6514M

3/4"

- 4 points
- DIN 3121



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	kg	1/24
651417M	17	39.8	34	28	53	353	1	24
651419M	19	39.8	34	28	53	339	1	24
651420M	20	41.8	36	28	53	381	1	24
651421M	21	41.8	36	28	53	369	1	24

Impact Bit Socket

KT No. & D1



6015M

3/4"

- Hexagon head
- DIN 3121




KT NO.	mm	L mm	Max. torq N-m		
601514M	H14	87	684	310	2 / 48
601517M	H17	87	1136	342	2 / 48
601519M	H19	87	1577	365	2 / 48
601521M	H21	87	2134	508	1 / 24
601522M	H22	87	2436	524	1 / 24
601524M	H24	87	2436	546	1 / 24
601527M	H27	87	2436	597	1 / 24
601530M	H30	87	2436	710	1 / 24
601532M	H32	87	2436	750	1 / 24

609616MxxH

609622MxxH 3/4"

- DIN 3121



609616MxxH



609622MxxH


KT NO.	S mm	mm	L (mm)	Max. torq N-m		
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40
609616M19H	H19	16	77	880	450	4 / 40
609616M22H	H22	16	77	880	473	4 / 40
609622M19H	H19	22	93	1577	670	1 / 24
609622M22H	H22	22	93	2436	692	1 / 24
609622M24H	H24	22	93	2436	706	1 / 24
609622M27H	H27	22	93	2436	730	1 / 24
609622M30H	H30	22	93	2436	744	1 / 24
609622M32H	H32	22	93	2436	783	1 / 24

1740

3/4"

609616M 3/4"

- Hex bit & bit holder
- DIN 3121

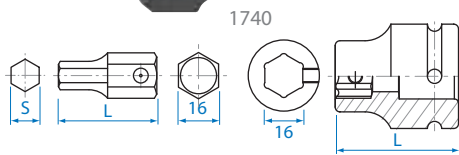

KT NO.	S mm	L mm	Max. torq N-m		
174010H	H10	40	264	46	20 / 400
174012H	H12	40	480	55	20 / 400
174014H	H14	40	684	61	20 / 200
174017H	H17	40	880	72	20 / 200
174019H	H19	40	880	83	20 / 200
174022H	H22	40	880	102	12 / 120
609616M	16	52	-	370	6 / 48


1954

3/4"

609622M

3/4"

- Hex bit & bit holder
- DIN 3121

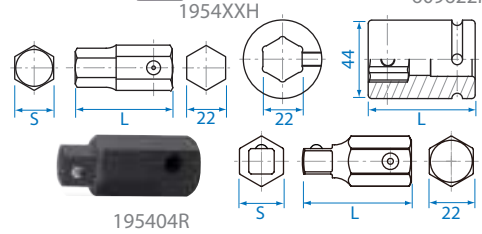


KT NO.	S mm	L mm	Max. torq N-m		
195419H	H19	54.5	1577	159	12 / 120
195422H	H22	54.5	2436	176	12 / 120
195424H	H24	54.5	2436	191	10 / 100
195427H	H27	54.5	2436	217	10 / 100
195430H	H30	54.5	2436	248	6 / 60
195432H	H32	54.5	2436	276	6 / 60
609622M	22	60.0	-	530	6 / 48
195404R	1/2"M	54.5	-	133	12 / 120

Impact Accessory

6797P

3/4"

- Universal joint
- DIN 3121




6797P

KT NO.	Overall length inch	mm	D mm		
6797P	4-1/2	114	44	738	2 / 20

6798P

3/4"

- Universal joint
- DIN 3121



6798P

KT NO.	Overall length inch	mm	D (mm)	D1 (mm)		
6798P	4-1/4	108	44	44	749	2 / 20


Impact Accessory

KT No. & D1



6260

- Extension bar
- DIN 3121



KT NO.	Overall length		g	⊠
	inch	mm		
6260-04	4	100	566	2 / 20
6260-07	7	175	864	2 / 20
6260-10	10	250	1145	1 / 16
6260-13	13	330	1450	1 / 10
6260-04P	4	100	566	2 / 20
6260-07P	7	175	864	2 / 20
6260-10P	10	250	1145	1 / 16
6260-13P	13	330	1450	1 / 10

6864

6864P

6868

6868P 3/4"

- Adapter
- Convert to 1/2" drive
- 6864 → Max. torque : 512 N·m
- DIN 3121



KT NO.	Spec.	D (mm)	g	⊠
6864	3/4"F x 1/2"M	44	311	6 / 48
6868	3/4"F x 1"M	44	445	6 / 48
6864P	3/4"F x 1/2"M	44	311	6 / 48
6868P	3/4"F x 1"M	44	445	6 / 48

6874

6874P 3/4"

- Adapter
- Convert to 1/2" drive
- 6874 → Max. torque : 512 N·m
- DIN 3121



KT NO.	Spec.	D (mm)	g	⊠
6874	3/4"F x 1/2"M	38	233	6 / 48
6874P	3/4"F x 1/2"M	38	233	6 / 48

90403

90404

90405 3/4"


- Locking ring
- High tensile rubber material

90603

90604

90607 3/4"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90603
90604
90607

90403
90404
90405

KT NO. Type \varnothing d / l Applied to socket sizes

90403	ring	3.5	33	6015M (14~19mm) 6435S (3/4"~1") 6510M (17~30mm) 6535S (1 1/16"~1-3/16") 6515M (17~30mm) 6935S (3/4"~1")
90607	pin	3.0	30	6874
90404	ring	5.5	37	6535M (17~46mm) 6535S (1-1/4"~1-13/16") 6435M (19~46mm) 6435S (1-1/16"~1-13/16") 6935M (19~32mm) 6935S (1-1/16"~1-1/4") 6015M (21~27mm) 6260.6797.6798.6864 6530M (17~46mm) 6868 6835M (17~32mm)
90603	pin	4.0	35	609616M.609622M
90405	ring	5.5	44	6535M (48~65mm) 6535S (1-7/8"~2-3/8") 6435M (48~50mm) 6435S (1-7/8"~2")
90604	pin	4.0	45	

Impact Bit Socket Set

6411MP

3/4"

Metal case size (mm) :
270 x 100 x 49 (0.048 cuft)



11
PC.

Contents

g 2.77 ⊠ 1 / 8

⊠	6096M	16, 22
⊠	1740	H10, H12, H14, H17
⊠	1954	H19, H22, H24, H27, H32

Impact Socket Set

6408MP

6408MP10

6408SP10

3/4"

Metal case size (mm) :
241 x 124 x 68 (0.07 cuft)



8
PC.

6408MP / 6408MP10 / 6408SP10

KT NO.		Contents		
6408MP	6535M	19, 22, 24, 27, 30, 32, 36, 38	3.9	1 / 6
6408MP10	6515M	19, 22, 24, 27, 30	3.9	
	6535M	32, 36, 38		
6408SP10	6535S	3/4, 7/8, 15/16, 1-1/16, 1-3/16, 1-1/4, 1-7/16, 1-1/2	3.8	

6409MP

6409MP03

6409SP10

3/4"

Metal case size (mm) :
445 x 100 x 65 (0.10 cuft)



6409MP / 6409MP03



6409SP10

8
PC.


KT NO.		Contents		
6409MP	6535M	26, 29, 30, 32, 34, 35, 36, 38	4.7	1 / 2
6409MP03	6535M	21, 22, 24, 27, 30, 32, 36, 41	4.7	
6409SP10	6535S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2	4.8	

6410MP

6410SP

3/4"

Metal case size (mm) :
445 x 100 x 65 (0.10 cuft)

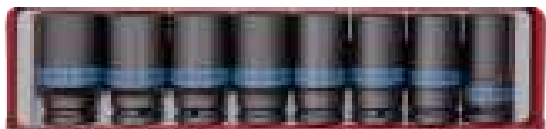

6410MP



6410SP

8
PC.


KT NO.		Contents	7.1	1 / 2
6410MP	6435M	26, 29, 30, 32, 34, 35, 36, 38		
6410SP	6435S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2		

Standard Impact Socket

8535M

1"


▪ DIN 3129, ISO 2725-2



8535S

1"

▪ ANSI / ASME B107.2



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	Icon
853519M	19	35	54	15	58	508	1 / 24
853521M	21	37	54	15	58	537	1 / 24
853522M	22	38	54	15	58	548	1 / 24
853523M	23	39	54	17	58	544	1 / 24
853524M	24	41	54	17	58	562	1 / 24
853525M	25	42	54	17	58	562	1 / 24
853526M	26	43	54	19	58	564	1 / 24
853527M	27	44	54	19	58	565	1 / 24
853528M	28	45	54	19	58	570	1 / 24
853529M	29	47	54	19	58	591	1 / 24
853530M	30	48	54	20	60	592	1 / 24
853532M	32	51	54	20	62	647	1 / 24
853533M	33	52	54	20	62	662	1 / 24
853534M	34	53	54	20	62	665	1 / 24
853535M	35	54	54	20	62	665	1 / 24
853536M	36	56	54	20	65	721	1 / 24
853537M	37	56	54	22	65	698	1 / 24
853538M	38	58	54	22	65	733	1 / 24
853540M	40	60	54	22	65	758	1 / 24
853541M	41	61	54	22	70	824	1 / 24
853542M	42	64	54	22	70	905	1 / 20
853544M	44	67	54	26	70	978	1 / 20
853545M	45	67	54	26	70	960	1 / 20
853546M	46	68	54	26	75	1033	1 / 20
853548M	48	70	54	26	75	1061	1 / 20
853550M	50	73	54	26	75	1170	1 / 20
853552M	52	75	54	30	80	1244	1 / 12
853553M	53	76	54	30	80	1278	1 / 12
853554M	54	78	54	30	80	1351	1 / 12
853555M	55	79	54	32	83	1435	1 / 12
853558M	58	83	54	32	83	1514	1 / 12
853560M	60	86	54	32	87	1693	1 / 12
853563M	63	90	54	34	87	1750	1 / 12
853565M	65	92	54	34	90	1750	1 / 12
853566M	66	94	54	34	90	1889	1 / 12
853568M	68	95	54	34	90	1963	1 / 12
853570M	70	97	54	34	93	2036	1 / 8
853571M	71	99	86	36	93	2917	1 / 8
853575M	75	104	86	36	95	3120	1 / 8
853580M	80	110	86	43	95	3387	1 / 4
853585M	85	115	86	43	95	3532	1 / 4
853590M	90	122	86	43	100	4004	1 / 4
853595M	95	130	95	52	105	4924	1 / 2
8535A0M	100	136	95	51	105	4972	1 / 2


KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	Icon
853524S	3/4	35	54	15	58	528	1 / 24
853526S	13/16	37	54	15	58	548	1 / 24
853528S	7/8	38	54	15	58	538	1 / 24
853530S	15/16	41	54	17	58	568	1 / 24
853532S	1	42	54	17	58	559	1 / 24
853534S	1-1/16	44	54	19	58	566	1 / 24
853536S	1-1/8	47	54	19	58	586	1 / 24
853538S	1-3/16	48	54	20	60	600	1 / 24
853540S	1-1/4	51	54	20	62	659	1 / 24
853542S	1-5/16	52	54	20	62	660	1 / 24
853544S	1-3/8	54	54	20	62	660	1 / 24
853546S	1-7/16	56	54	20	65	713	1 / 24
853548S	1-1/2	58	54	22	65	728	1 / 24
853550S	1-9/16	60	54	22	65	758	1 / 24
853552S	1-5/8	61	54	22	70	822	1 / 24
853554S	1-11/16	64	54	22	70	886	1 / 20
853556S	1-3/4	67	54	26	70	968	1 / 20
853558S	1-13/16	68	54	26	75	1075	1 / 20
853560S	1-7/8	70	54	26	75	1057	1 / 20
853562S	1-15/16	72	54	26	75	1100	1 / 20
853564S	2	74	54	30	75	1170	1 / 20
853566S	2-1/16	75	54	30	80	1225	1 / 12
853568S	2-1/8	78	54	30	80	1355	1 / 12
853570S	2-3/16	79	54	32	83	1423	1 / 12
853572S	2-1/4	82	54	32	83	1486	1 / 12
853574S	2-5/16	83	54	32	83	1459	1 / 12
853576S	2-3/8	86	54	32	87	1681	1 / 12
853578S	2-7/16	88	54	34	87	1681	1 / 12
853580S	2-1/2	90	54	34	87	1704	1 / 12
853582S	2-9/16	92	54	34	90	1881	1 / 12
853584S	2-5/8	94	54	34	90	1795	1 / 12
853586S	2-11/16	95	54	34	90	1931	1 / 12
853588S	2-3/4	97	54	34	93	2114	1 / 8
853590S	2-13/16	99	86	36	93	2869	1 / 8
853592S	2-7/8	102	86	36	93	2997	1 / 8
853594S	2-15/16	104	86	36	95	3161	1 / 8
853596S	3	106	86	36	95	3279	1 / 8
8535A0S	3-1/8	110	86	43	95	3386	1 / 4
8535A4S	3-1/4	112	86	43	95	3342	1 / 4
8535A8S	3-3/8	117	86	43	100	3873	1 / 4
8535B2S	3-1/2	122	86	43	100	4148	1 / 4

Deep Impact Socket

8435M



▪ DIN 3121




KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
843524M	24	41	54	25	90	874	1 / 24
843527M	27	44	54	25	90	871	1 / 24
843528M	28	45	54	25	90	887	1 / 24
843530M	30	48	54	28	90	908	1 / 24
843532M	32	51	54	28	90	953	1 / 24
843533M	33	52	54	28	92	1016	1 / 24
843534M	34	53	54	28	92	988	1 / 24
843535M	35	54	54	28	92	1020	1 / 24
843536M	36	56	54	32	92	1034	1 / 24
843538M	38	58	54	32	92	1048	1 / 24
843540M	40	60	54	32	92	1094	1 / 24
843541M	41	61	54	32	92	1103	1 / 24
843542M	42	64	54	32	92	1236	1 / 24
843546M	46	68	54	35	95	1329	1 / 10
843548M	48	70	54	35	95	1378	1 / 10
843550M	50	73	54	35	95	1484	1 / 10
843552M	52	75	54	40	100	1594	1 / 6
843554M	54	78	54	40	100	1714	1 / 6
843555M	55	79	54	40	100	1706	1 / 6
843558M	58	83	54	42	100	1887	1 / 6
843560M	60	86	54	42	100	2022	1 / 6
843565M	65	92	54	50	110	2133	1 / 6
843570M	70	97	54	59	110	2285	1 / 6

8435S



▪ ANSI / ASME B107.1




KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg
843530S	15/16	40.8	54	25	90	872	1 / 24
843532S	1	42	54	25	90	847	1 / 24
843534S	1-1/16	44	54	25	90	868	1 / 24
843536S	1-1/8	46.3	54	25	90	911	1 / 24
843538S	1-3/16	48	54	28	90	926	1 / 24
843540S	1-1/4	51	54	28	90	980	1 / 24
843542S	1-5/16	52	54	28	92	1010	1 / 24
843544S	1-3/8	54	54	28	92	1022	1 / 24
843546S	1-7/16	56	54	32	92	1017	1 / 24
843548S	1-1/2	58	54	32	92	1048	1 / 24
843550S	1-9/16	60	54	32	92	1096	1 / 24
843552S	1-5/8	61	54	32	92	1097	1 / 24
843554S	1-11/16	64	54	32	92	1211	1 / 24
843556S	1-3/4	67	54	32	92	1312	1 / 12
843558S	1-13/16	68	54	35	95	1322	1 / 12
843560S	1-7/8	70	54	35	95	1382	1 / 6
843562S	1-15/16	72	54	35	95	1450	1 / 6
843564S	2	74	54	35	95	1510	1 / 6
843566S	2-1/16	75	54	40	100	1589	1 / 6
843568S	2-1/8	78	54	40	100	1729	1 / 6
843570S	2-3/16	79	54	40	100	1646	1 / 6
843572S	2-1/4	82	54	42	100	1837	1 / 6

Thin Wall Impact Socket

8835M



- Thin wall version
- 6 points
- Metric size
- DIN 3121



KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
883524M	24	38.0	54	26	80	690	1 / 24
883527M	27	42.0	54	26	80	710	1 / 24
883529M	29	44.0	54	26	80	750	1 / 24
883530M	30	46.0	54	30	80	750	1 / 24
883532M	32	48.0	54	30	80	743	1 / 24
883533M	33	49.0	54	30	80	776	1 / 24
883534M	34	50.0	54	30	80	761	1 / 24
883535M	35	52.0	54	32	80	800	1 / 24
883536M	36	53.0	54	32	80	781	1 / 24
883538M	38	56.0	54	32	80	831	1 / 24
883541M	41	59.5	54	32	80	882	1 / 24

Rear Wheel Socket

8514M

8514S

8524M


- 4 points
- DIN 3121



8514M

8524M

8514S




KT NO.	SQ	D1 mm	D2 mm	l mm	L mm	g	kg
851417M	17	40.0	54	30.0	60	612	1 / 24
851419M	19	42.0	54	30.0	60	611	1 / 24
851420M	20	43.0	54	30.0	60	625	1 / 24
851421M	21	44.0	54	30.0	60	618	1 / 24
851422M	22	45.5	54	30.0	60	629	1 / 24
852421M	21	44.0	48	30.0	60	502	1 / 24
851426S	13/16	44	54	30.0	60	617	1 / 24

Rear Wheel Socket

8534M



- 4 points
- DIN 3121




KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	kg
853417M	17	38.0	54	23.5	76	658	1 / 24
853419M	19	43.0	54	23.5	76	717	1 / 24
853421M	21	47.0	54	23.5	76	773	1 / 24


8545M



- DIN 3121
- 17SQ x35MM Isuzu, Mitsubishi, Nissan, Mazda
- 19SQ x41MM Mazda
- 20SQ x38MM Hino, Toyota, Daihatsu
- 20SQ x41MM Hino, Toyota, Daihatsu
- 21SQ x41MM Scania, Isuzu, Hino, Mitsubishi, Nissan

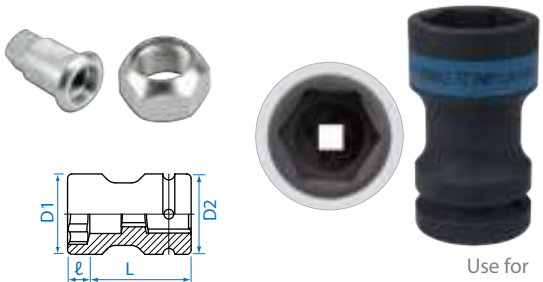

Use for

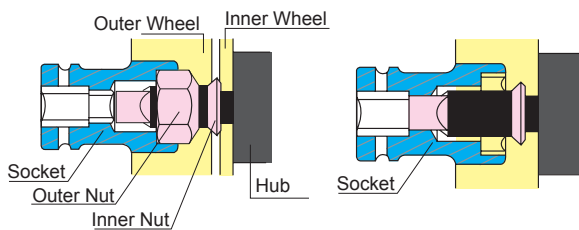

The wheel nut socket fits onto both outer nut and inner nut

KT NO.	SQ	mm	D1 mm	D2 mm	ℓ mm	L mm	g	kg
85451735M	17 x 35		54	54	13	83	857	1 / 24
85451941M	19 x 41		55	54	14	87	924	1 / 24
85452038M	20 x 38		58	54	14	83	796	1 / 24
85452041M	20 x 41		58	54	14	87	1086	1 / 24
85452141M	21 x 41		58	54	14	87	1017	1 / 24

Impact Bit Socket


1954



809622M



- Hex bit & bit holder
- DIN 3121




KT NO.	S mm	L mm	Max. torq N·m	g	kg
195419H	H19	54.5	1577	140	12 / 120
195422H	H22	54.5	2436	162	12 / 120
195424H	H24	54.5	2436	176	10 / 100
195427H	H27	54.5	2436	200	10 / 100
195430H	H30	54.5	2436	232	6 / 60
195432H	H32	54.5	2436	243	6 / 60
809622M	22	58.0	-	547	1 / 24

809622MxxH



- Hexagon head
- DIN 3121

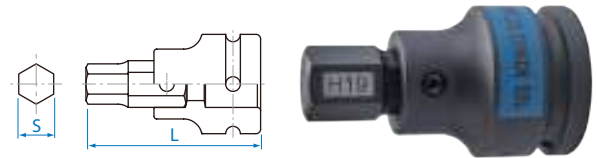

KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	kg
809622M19H	H19	22	93	1577	896	1 / 10
809622M22H	H22	22	93	2436	918	1 / 10
809622M24H	H24	22	93	2436	932	1 / 10
809622M27H	H27	22	93	2436	956	1 / 10
809622M30H	H30	22	93	2436	988	1 / 10
809622M32H	H32	22	93	2436	999	1 / 10



Impact Accessory

8260

- Extension bar
- DIN 3121




8260

8260P

KT NO.	Overall Length		g	g
	Inch	mm		
8260-07	7	175	1400	1 / 12
8260-10	10	250	1932	1 / 12
8260-13	13	330	2458	1 / 8
8260-07P	7	175	1400	1 / 12
8260-10P	10	250	1932	1 / 12
8260-13P	13	330	2458	1 / 8

8797

- Universal joint
- DIN 3121



8797P

1"



8797

8797P

KT NO.	Overall Length		D mm	g	g
	Inch	mm			
8797	5	125	60	1491	1 / 18
8797P	5	125	60	1491	1 / 18

8866

- Adapter
- Convert to 3/4" drive
- 8866 → Max. torque : 1412 N·m
- DIN 3121



8866

8866P

KT NO.	Spec.	g	g
8866	1" F x 3/4" M	606	4 / 32
8866P	1" F x 3/4" M	606	4 / 32

8869

- Adapter
- Convert to 1-1/2" drive
- DIN 3121



8869

8869P

KT NO.	Spec.	g	g
8869	1" F x 1-1/2" M	941	1 / 24
8869P	1" F x 1-1/2" M	941	1 / 24

90405

- Locking ring
- High tensile rubber material

90406

1"

90605


- Locking pin
- Chrome vanadium steel
- DIN 3129

90606

1"



90605
90606



90405
90406

KT NO.	Type	∅	d / l	Applied to socket sizes
90405	ring	5.5	44	8535M (19~70mm) 8535S (3/4"-2-3/4") 8435M (24~60mm) 8435S (15/16"-2-1/4") 8835M (24~60mm)
90605	pin	5.0	45	8514M.8514S.8534M.806519M 8260.8797.8866.8869
90406	ring	10	75	8535M (71~90mm) 8535S (2-13/16"-3-1/2")
90606	pin	5.0	75	

Impact Socket Set

8404MP

1"

Metal case size (mm) :
241 x 124 x 68 (0.51 cuft)



4
PC.

Contents

4.65 1 / 4

8435M 27, 30, 32, 33

8409MP

1"

Metal case size (mm) :
445 x 100 x 65 (0.104 cuft)



8
PC.

Contents

8.9 1 / 2

8435M 24, 27, 30, 32, 33, 36, 38, 41

8408MP

8408MP02 1"

- 6 PC. thin wall deep version
- 2 PC. rear wheel, square

Metal case size (mm) :
445 x 120 x 68 (0.128 cuft)

8
PC.



KT NO. Contents 6.4 1 / 4

8408MP	8835M	24, 27, 32, 36, 38, 41	8534M	17, 21
8408MP02				19, 21

8410MP

8410SP 1"

Metal case size (mm) :
280 x 130 x 74 (0.095 cuft)



8
PC.

KT NO. Contents 6.4 1 / 4

8410MP	8535M	24, 27, 30, 32, 33, 36, 38, 41		
8410SP	8535S	15/16, 1-1/16, 1-3/16, 1-1/4, 1-5/16, 1-7/16, 1-1/2, 1-5/8		

Impact Accessory

9260

9260P 1-1/2"

- Extension bar
- DIN 3121



9260



9260P

KT NO. Overall length

KT NO.	Overall length inch mm		
9260-13	13 330	5900	1 / 4
9260-13P	13 330	5900	1 / 4

9868

9868P 1-1/2"

- Adapter
- Convert to 1" drive
- Max. → torque : 2515 N·m
- DIN 3121



9868



9868P

KT NO. Spec.


KT NO.	Spec.		
9868	1-1/2" F x 1"M	2250	1 / 6
9868P	1-1/2" F x 1"M	2250	1 / 6

Standard Impact Socket

9535M

1-1/2"

▪ DIN 3129




KT NO.	mm	D1 mm	D2 mm	l mm	L mm	Kg	1/6
953532M	32	56	86	23	80	1.393	1 / 6
953533M	33	57	86	23	80	1.952	1 / 6
953534M	34	58	86	24	80	1.923	1 / 6
953536M	36	62	86	26	80	1.994	1 / 6
953538M	38	64	86	26	80	2.001	1 / 6
953541M	41	68	86	28	80	2.056	1 / 6
953542M	42	70	86	28	80	2.081	1 / 6
953546M	46	73	86	30	85	2.154	1 / 6
953550M	50	78	86	32	85	2.246	1 / 6
953555M	55	85	86	36	93	2.520	1 / 6
953560M	60	90	86	40	95	2.757	1 / 6
953565M	65	96	86	42	100	3.134	1 / 6
953570M	70	103	86	46	103	3.529	1 / 6
953575M	75	108	86	48	105	3.713	1 / 4
953580M	80	115	86	52	105	3.934	1 / 4
953585M	85	121	86	55	110	4.467	1 / 4
953590M	90	127	86	58	110	4.652	1 / 4
953595M	95	134	127	50	110	7.224	1 / 1
9535A0M	100	140	127	53	115	7.729	1 / 1
9535A5M	105	146	127	53	115	7.856	1 / 1
9535B0M	110	152	127	56	125	8.845	1 / 1
9535B5M	115	160	127	60	125	9.454	1 / 1
9535C0M	120	166	127	62	130	9.960	1 / 1
9535C5M	125	172	127	65	135	10.826	1 / 1
9535D0M	130	180	127	68	140	12.423	1 / 1
9535D5M	135	185	127	70	145	13.240	1 / 1
9535E0M	140	190	127	75	150	13.570	1 / 1
9535F0M	150	200	127	80	155	14.270	1 / 1

9535S

1-1/2"

▪ ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	l mm	L mm	Kg	1/6
953564S	2	81	86	35	85	2.305	1 / 6
953566S	2-1/16	82	86	36	85	2.364	1 / 6
953568S	2-1/8	84	86	36	90	2.508	1 / 6
953570S	2-3/16	85	86	43	93	3.204	1 / 6
953572S	2-1/4	87	86	43	93	5.209	1 / 6
953574S	2-5/16	89	86	43	93	2.560	1 / 6
953576S	2-3/8	90	86	45	95	2.622	1 / 6
953578S	2-7/16	93	86	44	95	2.711	1 / 6
953580S	2-1/2	95	86	46	97	2.833	1 / 6
953582S	2-9/16	96	86	49	100	2.863	1 / 6
953584S	2-5/8	99	86	48	100	2.958	1 / 6
953586S	2-11/16	101	86	48	100	3.055	1 / 6
953588S	2-3/4	103	86	48	103	3.217	1 / 6
953590S	2-13/16	105	86	50	105	3.306	1 / 6
953592S	2-7/8	107	86	50	105	3.600	1 / 6
953594S	2-15/16	108	86	50	105	3.455	1 / 6
953596S	3	111	86	50	105	3.590	1 / 4
953598S	3-1/16	114	86	52	105	3.931	1 / 4
9535A0S	3-1/8	116	86	53	105	4.123	1 / 4
9535A2S	3-3/16	118	86	53	105	4.089	1 / 4
9535A4S	3-1/4	120	86	54	105	4.829	1 / 4
9535A6S	3-5/16	122	86	56	105	4.207	1 / 4
9535A8S	3-3/8	123	86	56	105	4.306	1 / 4
9535B0S	3-7/16	125	86	57	105	4.256	1 / 4
9535B2S	3-1/2	129	86	60	110	4.905	1 / 4
9535B4S	3-9/16	130	86	60	110	5.435	1 / 4
9535B6S	3-5/8	131	86	60	110	4.894	1 / 4
9535B8S	3-11/16	133	86	62	113	5.468	1 / 1
9535C0S	3-3/4	136	127	62	113	3.741	1 / 1
9535C2S	3-13/16	138	127	64	120	9.098	1 / 1
9535C4S	3-7/8	139	127	66	120	8.954	1 / 1
9535C6S	3-15/16	140	127	66	120	8.931	1 / 1
9535C8S	4	142	127	66	120	7.886	1 / 1
9535D0S	4-1/16	143	127	68	120	7.843	1 / 1
9535D2S	4-1/8	146	127	68	120	8.003	1 / 1
9535D4S	4-3/16	146	127	70	120	7.851	1 / 1
9535D6S	4-1/4	150	127	72	124	8.385	1 / 1
9535D8S	4-5/16	154	127	72	124	8.973	1 / 1
9535E0S	4-3/8	155	127	72	124	8.923	1 / 1
9535E2S	4-7/16	155	127	75	128	9.033	1 / 1
9535E4S	4-1/2	159	127	75	128	9.258	1 / 1
9535E8S	4-5/8	164	127	79	132	13.730	1 / 1
9535F2S	4-3/4	167	127	79	132	10.386	1 / 1
9535F6S	4-7/8	171	127	79	136	10.930	1 / 1
9535G0S	5	174	127	79	140	11.338	1 / 1
9535G4S	5-1/8	180	127	80	143	12.279	1 / 1
9535G8S	5-1/4	184	127	80	145	12.728	1 / 1
9535J2S	6	203	127	85	165	14.270	1 / 1

